


DISPLAY CONTROL PANEL SETTINGS:

PRESS AND HOLD THE BLUE CONTROL SWITCH (SEE NOTE 1) FOR 4 FLASHES OF THE RED CONTROL LED (SEE NOTE 2), THEN RELEASE. THE "PARAMETER" SCREEN SHOULD APPEAR ON THE JAMB-MOUNTED DISPLAY CONTROL PANEL. SCROLL DOWN TO THE BOTTOM AND SELECT "INPUT". THEN ON THE "INPUT" SCREEN SCROLL DOWN AND SELECT "AUX. SW", THEN ON THE "AUX. SW" SCREEN SCROLL DOWN AND SELECT "SAFETY BEAM". CONNECT THE SAFETY SENSORS AS SHOWN BELOW.

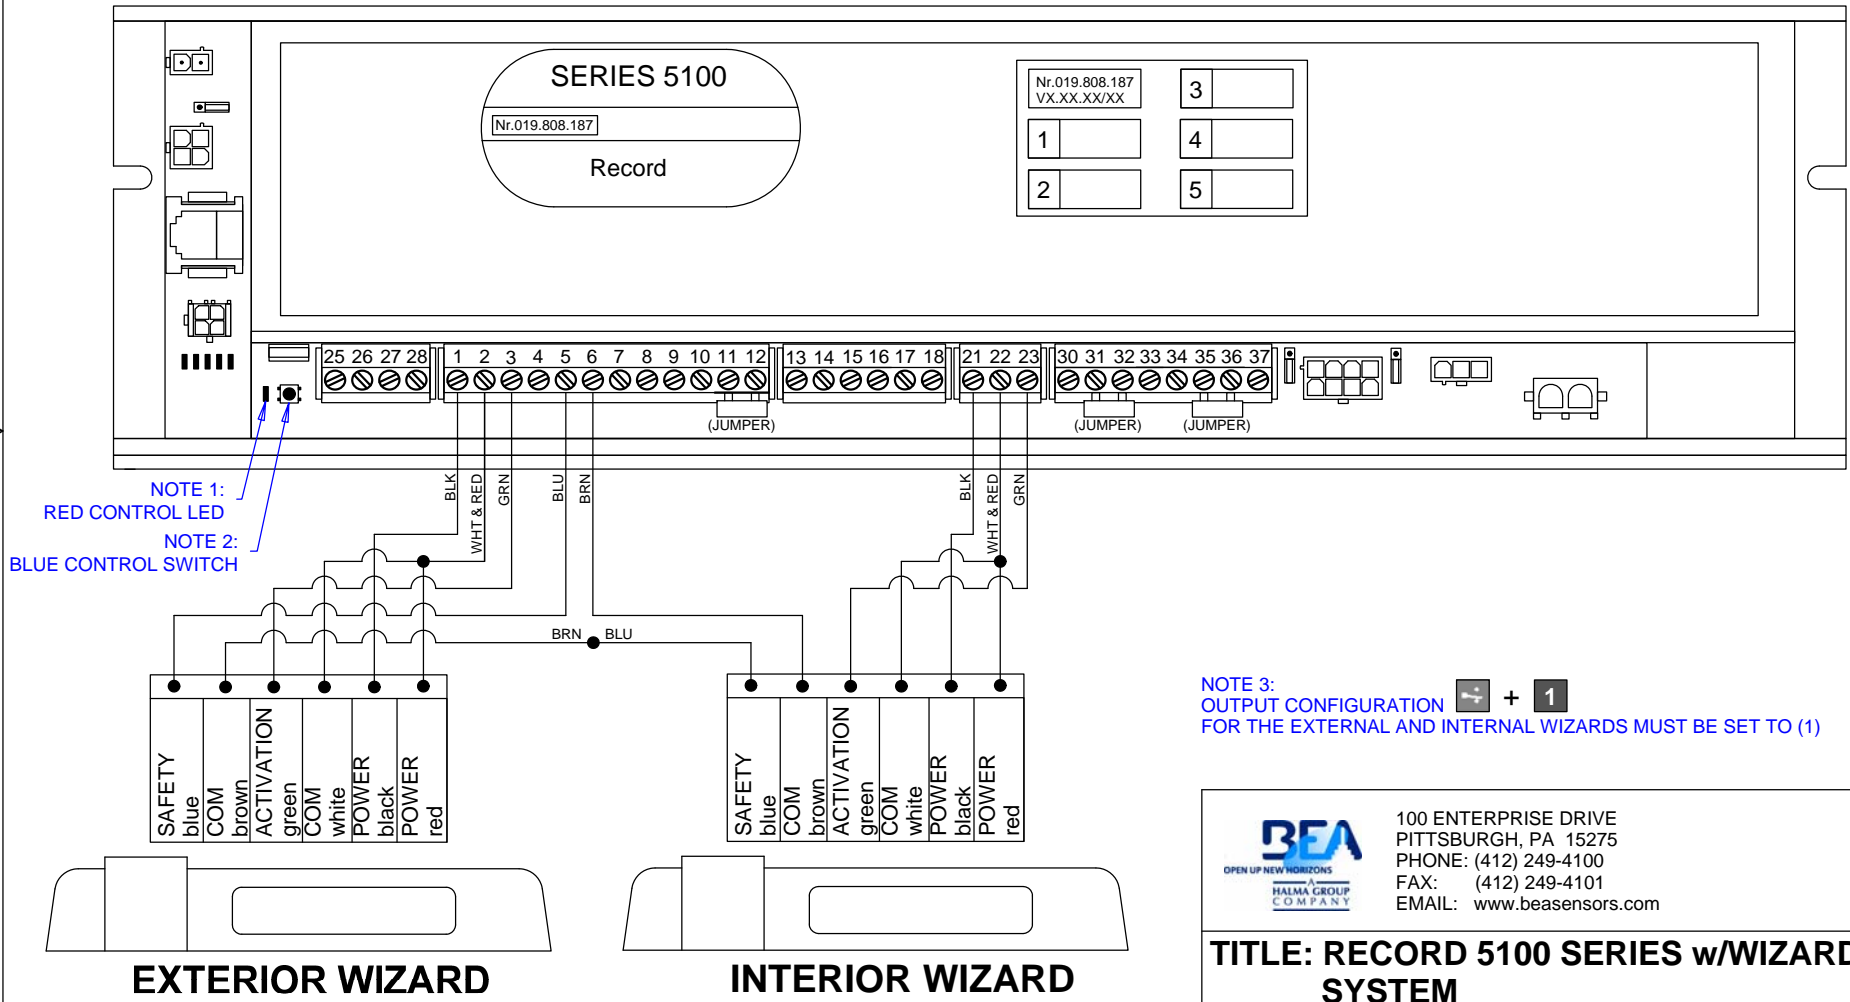

BEA
OPEN UP NEW HORIZONS
HALMA GROUP
COMPANY

100 ENTERPRISE DRIVE
PITTSBURGH, PA 15275
PHONE: (412) 249-4100
FAX: (412) 249-4101
EMAIL: www.beasensors.com

TITLE: RECORD 5100 SERIES w/WIZARDII SYSTEM

SIZE: A	DRAWN BY: TUC	REV BY: TUC	PART NO: 80.0247.00
	SCALE: NONE	DATE: 28 NOV 2006	SHEET 1 OF 1

IF AFTER TROUBLESHOOTING A PROBLEM, A SATISFACTORY SOLUTION CANNOT BE ACHIEVED, PLEASE CALL B.E.A., INC. FOR FURTHER ASSISTANCE DURING EASTERN STANDARD TIME AT 1-800-523-2462 FROM 8AM - 5PM. FOR AFTER-HOURS, CALL EAST COAST: 1-866-836-1863 OR 1-800-407-4545 / MID-WEST: 1-888-308-8843 / WEST COAST: 1-888-419-2564. DO NOT LEAVE ANY PROBLEM UNRESOLVED. IF YOU MUST WAIT FOR THE FOLLOWING WORKDAY TO CALL B.E.A., LEAVE THE DOOR INOPERABLE UNTIL SATISFACTORY REPAIRS CAN BE MADE. NEVER SACRIFICE THE SAFE OPERATION OF THE AUTOMATIC DOOR OR GATE FOR AN INCOMPLETE SOLUTION.WEB: WWW.BEASENSORS.COM